



#####

## ALASKA C PRO S3

ALASKACPRO





#####

Safety Jogger ALASKA C PRO #####

##### #####  
## #####  
#### SJ#####  
##### ####  
##### ##  
##### ####  
##### S3 / SR, #####, HRO  
##### EU 35-48 / UK 3.0-13.0 / US 3.0-13.5  
JPN 21.5-31.5 / KOR 230-315  
##### 0.830 kg  
## EN ISO 20345:2022  
ASTM F2413:2024



3FIT  
SYSTEM  
NESKID

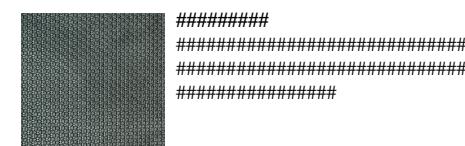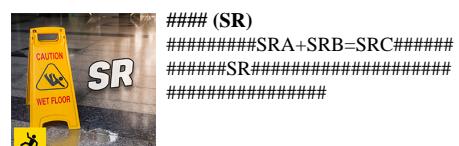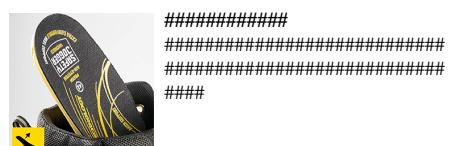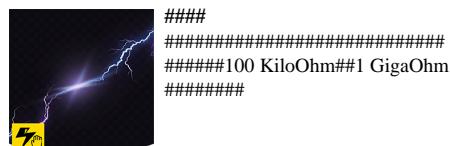

Proudly ranked in the  
top 1% by EcoVadis  
for sustainability.



#####:

##, ##, #####, ####

#####:

####, ####, ####, ####, ####, ####, ####, ####

#####:

#####, #####, #####, #####, #####, #####, #####, #####

	####	####	##	EN ISO 20345
####	#####			
	#####	mg/cm <sup>2</sup> /h	2.0	# 0.8
	#####	mg/cm <sup>2</sup>	17	# 15
##	####			
	#####	mg/cm <sup>2</sup> /h	28.68	# 2
	#####	mg/cm <sup>2</sup>	230	# 20
#####	SJ#####			
	#####	####	Dry 25600 cycles/Wet 12800 cycles	25600/12800
#####	##			
	#####	mm <sup>3</sup>	Relative volume loss:123g/cm <sup>3</sup> (Density:1.14)	# 150
	##### - #####NaLS - #####	#####	0.42	# 0.31
	##### - #####NaLS - #####	#####	0.45	# 0.36
	SR ### - ##### - #####	#####	0.33	# 0.19
	SR##### - ##### - #####	#####	0.33	# 0.22
	#####	#####	20.9	0.1 - 100
	ESD#	#####	N/A	0.1 - 100
	#####	J	53	# 20
#####	###			
	#####100J#	mm	NA	N/A
	#####10kN#####	mm	NA	N/A
	#####200J#	mm	19.0	# 14
	#####15kN#	mm	22.5	# 14

#####:

#####Safety Jogger #####



**HEAD-TO-TOE  
PROTECTION**



Proudly ranked in the top 1% by EcoVadis for sustainability.

ENGINEERED  
IN EUROPE

[www.safetyjogger.com](http://www.safetyjogger.com)