



#####

### BESTFIT S1 P

#####  
 Safety Jogger BESTFIT#####SR#####  
 #####  
 #####

####	#####
##	####
####	SJ#####
#####	###
#####	PU/PU
#####	###
####	S1 P / SRC
#####	EU 36-48 / UK 3.5-13.0 / US 4.0-13.5 JPN 22.5-31.5 / KOR 235-315
#####	0.678 kg
##	ASTM F2413:2018 EN ISO 20345:2011



BLK



DBN



####:  
 #####, #####, ####, #####, ##, #####, #####, ##, #####, #####

#####:  
 #####, #####, #####


#####:  
 #####

####	####	##	EN ISO 20345
####	#####		
	#####	mg/cm <sup>2</sup> /h	1.7 # 0.8
	#####	mg/cm <sup>2</sup>	18.5 # 15
##	####		
	#####	mg/cm <sup>2</sup> /h	33.5 # 2
	#####	mg/cm <sup>2</sup>	269 # 20
####	SJ#####		
	#####	####	25600/12800 25600/12800
#####	PU/PU		
	#####	mm <sup>3</sup>	24.3 # 150
	##### SRA####	#####	0.34 # 0.28
	##### SRA####	#####	0.33 # 0.32
	##### SRB####	#####	0.16 # 0.13
	##### SRB####	#####	0.19 # 0.18
	#####	#####	223 0.1 - 1000
	ESD#	#####	N/A 0.1 - 100
	#####	J	33 # 20
#####	####		
	#####100J#	mm	N/A N/A
	#####10kN#####	mm	N/A N/A
	#####200J#	mm	17.5 # 14
	#####15kN#	mm	21.0 # 14

#####:  
 #####Safety Jogger #####



HEAD-TO-TOE  
 PROTECTION

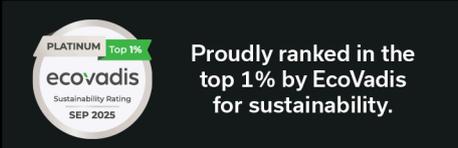

Proudly ranked in the  
 top 1% by EcoVadis  
 for sustainability.



www.safetyjogger.com