


## CLIMBER S3S

##### CLIMBER #####  
##### SJ #####  
##### PU #####  
##### S3S / SR #####  
EU 35-49 / UK 3.0-13.5 / US 3.0-14.5  
JPN 21.5-32.5 / KOR 230-325  
0.649 kg  
EN ISO 20345:2022+A1:2024  
ASTM F2413:2024



117

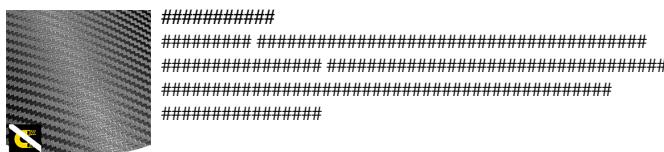


##### SRC #####

##### SRC ##### SRA ##### SRB #####



##### #####

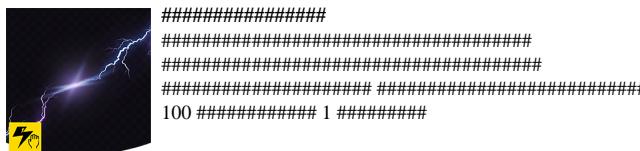

SJ #####  
#####  
#####  
#####  
#####

#####:

#####, #####, #####, #####, #####, #####, #####

#####:

#####, #####, #####, #####

#####:

##### ##### ##### ##### ##### ##### ##### #####

#####	#####	#####	#####	EN ISO 20345
#####	#####, #####	##./##./##	9.35	# 0.8
#####	#####	##./##	79	# 15
#####	#####	##./##./##	49.8	# 2
#####	#####	##./##	398.8	# 20
#####	SJ #####	##	25600/12800	25600/12800
##### PU	##### (#####) (###)	##		
	##### (#####) (#####)	##	77	# 150
	##### - ##### + NaLS - #####	#####	0.32	# 0.31
	##### - ##### + NaLS - #####	#####	0.38	# 0.36
	SR Slip Resistance - Ceramic + Glycerin - #####	#####	0.20	# 0.19
	##### SR - ##### + ##### - #####	#####	0.24	# 0.22
	#####	#####	79.3	0.1 - 1000
	## ESD	#####	N/A	0.1 - 100
	#####	##	37	# 20
#####	#####	##	N/A	N/A
	##### (##### 100J)	##	N/A	N/A
	##### (##### 10kN)	##	15.5	# 14
	##### (##### 200J)	##	23.0	# 14
	##### (##### 15kN)	##		

#####:

##### ##### ##### ##### ##### ##### ##### ##### Safety Jogger ##### ##### #####



**HEAD-TO-TOE  
PROTECTION**



Proudly ranked in the  
top 1% by EcoVadis  
for sustainability.

ENGINEERED  
IN EUROPE

[www.safetyjogger.com](http://www.safetyjogger.com)