




SAFETY JOGGER

INDUSTRIAL

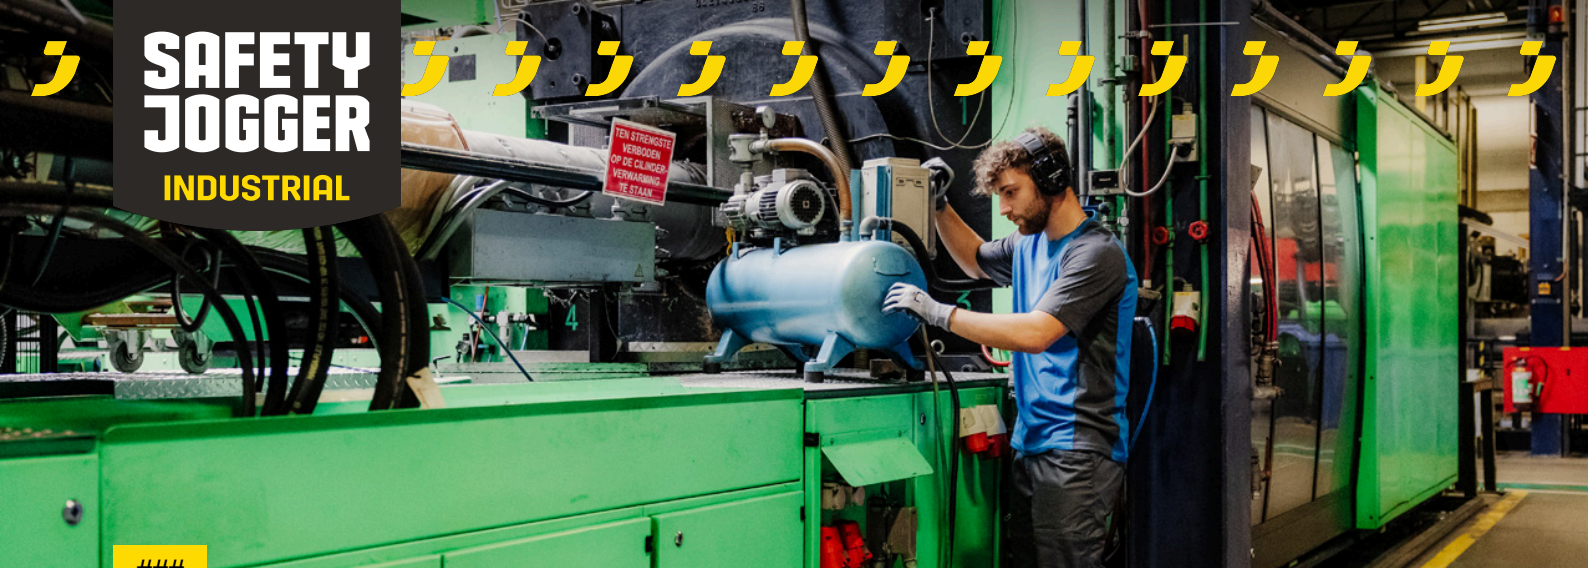

###

CONSTRUBOY EW S3 MID

COBOYEWS3M

#####

CONSTRUBOY EW#####

#####BASF PU#####

#####

#####,

#####

SJ#####

#####

##PU/##PU

#####

S3 / SR, SC, ####, #####,


EU 35-48 / UK 3.0-13.0 / US 3.0-13.5

JPN 21.5-31.5 / KOR 230-315

0.690 kg

ASTM F2413:2018

EN ISO 20345:2022+A1:2024



#####



#####CI#
#####CI#####
##



#####LG#

#####



#####



#####SC#

###



#####

SAFETY JOGGER

WORKS

HEAD-TO-TOE PROTECTION



Proudly ranked in the
top 1% by EcoVadis
for sustainability.

ENGINEERED
IN EUROPE

www.safetyjogger.com

####:
####, ##, ####, #####, ####, ##

#####:
####, #####, ####, ####, #####

#####:
#####

| | #### | #### | ## | EN ISO 20345 |
|-------|---------------------------|----------|-----------------------------------|--------------|
| #### | #####, #### | | | |
| | ##### | mg/cm²/h | 1.2 | # 0.8 |
| | ##### | mg/cm² | 16 | # 15 |
| ## | ##### | | | |
| | ##### | mg/cm²/h | 86.31 | # 2 |
| | ##### | mg/cm² | 691 | # 20 |
| #### | SJ##### | | | |
| | ##### | #### | Dry 25600 cycles/Wet 12800 cycles | 25600/12800 |
| ##### | ###PU/###PU | | | |
| | ##### | mm³ | 50 | # 150 |
| | ##### - #####NaLS - ##### | ##### | 0.41 | # 0.31 |
| | ##### - #####NaLS - ##### | ##### | 0.39 | # 0.36 |
| | SR ### - ##### - ##### | ##### | 0.32 | # 0.19 |
| | SR##### - ##### - ##### | ##### | 0.35 | # 0.22 |
| | #### | ##### | 35.3 | 0.1 - 1000 |
| | ESD# | ##### | N/A | 0.1 - 100 |
| | ##### | J | 36 | # 20 |
| ##### | #### | | | |
| | #####100J# | mm | N/A | N/A |
| | #####10kN##### | mm | N/A | N/A |
| | #####200J# | mm | 19.5 | # 14 |
| | #####15kN# | mm | 23.5 | # 14 |

#####.

#####Safety Jogger #####



HEAD-TO-TOE
PROTECTION



Proudly ranked in the
top 1% by EcoVadis
for sustainability.



www.safetyjogger.com