




# SAFETY JOGGER

## INDUSTRIAL

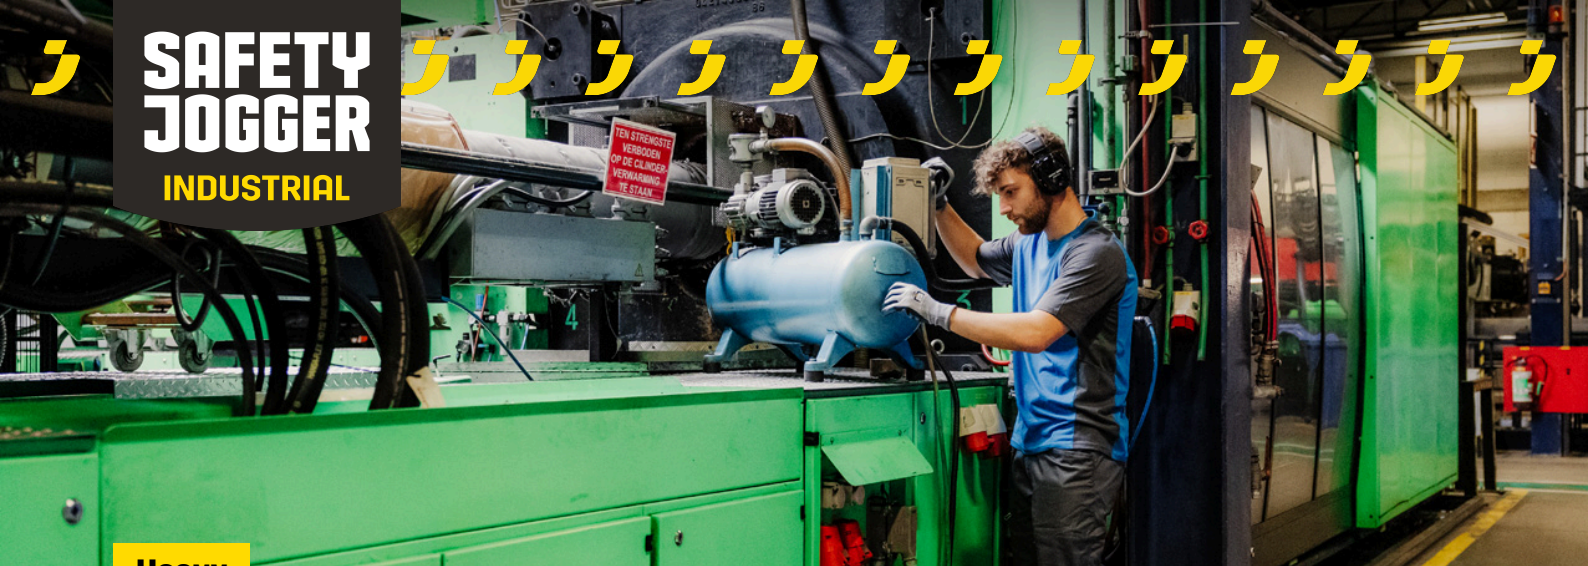

**Heavy**

## CONSTRUBOY S3 LOW

COBOYS3L

**New generation Bestrun for heavy application**

Safety Jogger COBOYS3L Safety Shoes offer SRC slip resistance, oil & fuel resistance, and breathable comfort. Ideal for high-risk environments, they assure protection against perforations and foot crushing.

Upper	Full Grain Leather
Lining	3D-Mesh
Footbed	SJ foam footbed
Midsole	Steel
Outsole	BASF PU/BASF PU
Toecap	Steel
Category	S3 / SR, SC, CI, FO
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.673 kg
Norms	ASTM F2413:2018 EN ISO 20345:2022



BLK



### 3D mesh

Three-dimensional produced distance mesh to provide increased moisture and temperature management.




### Breathable leather upper

Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.



### S3

S3 safety shoes are suitable for work in an environment with high humidity and presence of oil or hydrocarbons. These shoes also protect against perforation risk of the sole, and foot crushing.



### Oil & fuel resistant

The outsole is resistant against oil and fuel.



### SRC slip resistance

Slip resistant soles are one of the most important features of safety and occupational footwear. SRC slip resistant soles pass both SRA and SRB slip resistant tests, they are tested on both steel and ceramic surfaces.

**SAFETY  
JOGGER**  
WORKS

**Solutions for every workplace**

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

**ENGINEERED  
IN EUROPE**

[www.safetyjogger.com](http://www.safetyjogger.com)

Industries:

Chemical, Construction, Industry, Mining, Oil & Gas

Environments:

Cold environment, Dry environment, Extreme slippery surfaces, Snowy and icy, Muddy environment, Uneven surfaces, Wet environment

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	Full Grain Leather			
	Upper: permeability to water vapor	mg/cm²/h	1.1	≥ 0.8
	Upper: water vapor coefficient	mg/cm²	19.5	≥ 15
Lining	3D-Mesh			
	Lining: permeability to water vapor	mg/cm²/h	73.2	≥ 2
	Lining: water vapor coefficient	mg/cm²	585.9	≥ 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	Dry 25600 cycles/Wet 12800 cycles	25600/12800
Outsole	BASF PU/BASF PU			
	Outsole abrasion resistance (volume loss)	mm³	30.0mm³(Density:1.18g/cm³)	≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction	0.35	≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction	0.43	≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction	0.20	≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction	0.30	≥ 0.22
	Antistatic value	MegaOhm	192	0.1 - 1000
	ESD value	MegaOhm	N/A	0.1 - 100
	Heel energy absorption	J	34	≥ 20
Toecap	Steel			
	Impact resistance toecap (clearance after impact 100J)	mm	N/A	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	N/A	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	17.0	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	21.0	≥ 14

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED  
IN EUROPE

www.safetyjogger.com