


SAFETY JOGGER

INDUSTRIAL

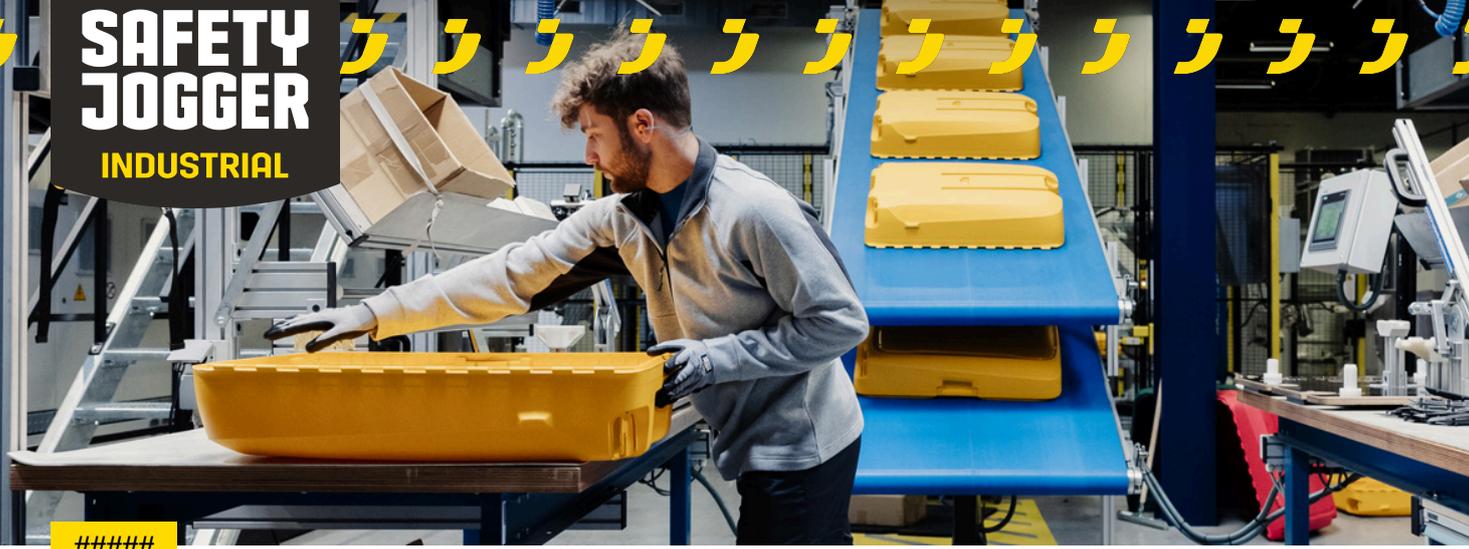

#####

ECONILA S1 LOW

ECONILAS1L

#####

ECONILA#####

#####ESD#####

#####

####	#####
##	#####
####	SJ#####
#####	N/A
#####	#####/###
#####	#####
####	S1 / SR, ESD, #####, HRO
####	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
#####	0.429 kg
##	ASTM F2413:2018 EN ISO 20345:2022



BLK




KHA




#####




#####

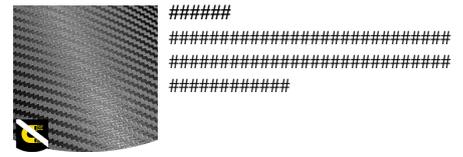


#####

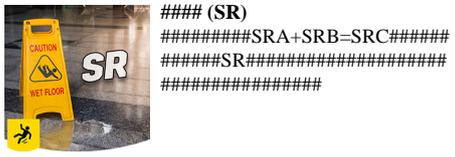

(SR)
#####SRA+SRB=SRC#####
#####SR#####
#####

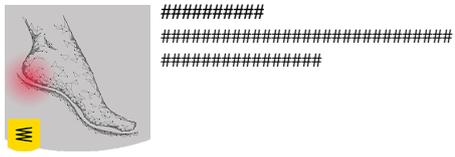

#####

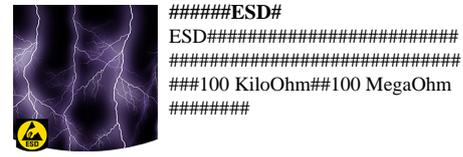

#####ESD#
ESD#####
#####100 KiloOhm##100 MegaOhm
#####

####:
 ##, #####, #####, ####

#####:
 #####, #####

#####:
 #####

####	####	##	EN ISO 20345
####	#####		
	#####	mg/cm ² /h	2.3 # 0.8
	#####	mg/cm ²	45 # 15
##	#####		
	#####	mg/cm ² /h	34.59 # 2
	#####	mg/cm ²	277 # 20
####	SJ#####		
	#####	####	Dry 25600 cycles/Wet 12800 cycles 25600/12800
#####	#####/###		
	#####	mm ³	119.4mm ³ (Density:1.3) # 150
	##### SRA####	#####	0.32 # 0.28
	##### SRA####	#####	0.40 # 0.32
	##### SRB####	#####	0.18 # 0.13
	##### SRB####	#####	0.21 # 0.18
	####	#####	215 0.1 - 1000
	ESD#	#####	14.6 0.1 - 100
	#####	J	25 # 20
#####	#####		
	#####100J#	mm	NA N/A
	#####10kN#####	mm	NA N/A
	#####200J#	mm	16 # 14
	#####15kN#	mm	17 # 14

####:

#####Safety Jogger #####



HEAD-TO-TOE PROTECTION



Proudly ranked in the top 1% by EcoVadis for sustainability.



www.safetyjogger.com