

SAFETY JOGGER

INDUSTRIAL



#

ECONILA S1 LOW

ECONILAS1L

#####

#####ECONILA #####




##	GRS#####
##	#####
##	SJ #####
##	###
##	##/####
##	#####
##	S1 / SR, ESD, FO, HRO
####	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5
	JPN 21.5-31.5 / KOR 230-315
####	0.429 kg
##	ASTM F2413:2018
	EN ISO 20345:2022



BLK



KHA

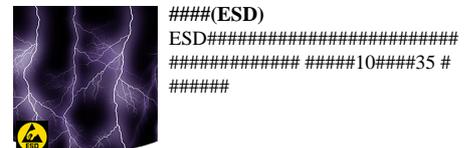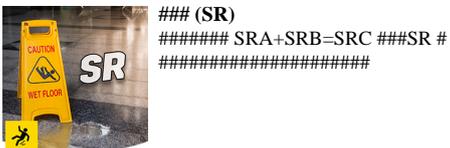

##:
##, ##, ##, ##

##:
####, #####

####:
#####

##	##	####	##	EN ISO 20345
##	GRS#####			
	#####	##/####/#	2.3	#### 0.8
	#####	##/####	45	#### 15
##	#####			
	#####	##/####/#	34.59	#### 2
	#####	##/####	277	#### 20
##	SJ #####			
	#####/#####	##	Dry 25600 cycles/Wet 12800 cycles	25600/12800
##	##/####			
	#####	## ³	119.4mm ³ (Density:1.3)	#### 150
	####SRA###	##	0.32	#### 0.28
	####SRA###	##	0.40	#### 0.32
	####SRB###	##	0.18	#### 0.13
	####SRB###	##	0.21	#### 0.18
	####	##	215	0.1 - 1000
	ESD#	##	14.6	0.1 - 100
	####	J	25	#### 20
##	#####			
	#####100J#	##	NA	N/A
	#####10kN#	##	NA	N/A
	#####200J#	##	16	#### 14
	#####15kN#	##	17	#### 14

####:

#####Safety Jogger#####



HEAD-TO-TOE
PROTECTION



Proudly ranked in the
top 1% by EcoVadis
for sustainability.



www.safetyjogger.com