

**SAFETY
JOGGER**
INDUSTRIAL



#

FLOW S1P SANDAL TLS

FLows1pstl


#####

FLOW ##### FLOW #####
ESD#####

3D ####
SJ #####

###PU/###PU

S1 P / ESD, SRC
EU 35-48 / UK 3.0-13.0 / US 3.0-13.5
JPN 21.5-31.5 / KOR 230-315
0.610 kg
ASTM F2413:2018
EN ISO 20345:2011

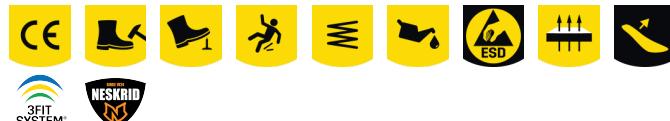

TLS#####

Safety Jogger###TLS#####

#####Safety Jogger#####

#####



####


#####



###

#####

#10###1#####



#####

#####



####

#####



####(ESD)

ESD##### ##### #####10###35 #
#####

**SAFETY
JOGGER
WORKS**

**HEAD-TO-TOE
PROTECTION**



Proudly ranked in the
top 1% by EcoVadis
for sustainability.

ENGINEERED
IN EUROPE

www.safetyjogger.com

##:
##, ##, ##, ##

##:
####, #####

####:
#####

##	####	##	EN ISO 20345
##	#####		
	#####	##/###/##	2.2
	#####	##/###	28
##	3D ####		
	#####	##/###/##	61
	#####	##/###	490
##	SJ #####		
	#####/#####	##	25600/12800
##	##PU/##PU		
	#####	## ³	84
	####SRA##	##	0.36
	####SRA##	##	0.37
	####SRB##	##	0.14
	####SRB##	##	0.19
	####	##	N/A
	ESD#	##	39
	####	J	27
##	#####		
	#####100J#	##	N/A
	#####10kN#	##	N/A
	#####200J#	##	15.0
	#####15kN#	##	19.0

####:

#####, #####Safety Jogger#####



**HEAD-TO-TOE
PROTECTION**



Proudly ranked in the
top 1% by EcoVadis
for sustainability.

ENGINEERED
IN EUROPE

www.safetyjogger.com