



#

FLOW EH LOW SB




FLOWSBPLEH

##EH#####

#####FLOW EH #####EH#####
####FLOW EH #####

3D #####
SJ #####
###PU/###PU

SB / P, SRC, E, FO, EH
EU 35-47 / UK 3.0-12.0 / US 3.0-13.0
JPN 21.5-31 / KOR 230-310
0.592 kg
ASTM F2413:2018
EN ISO 20345:2011

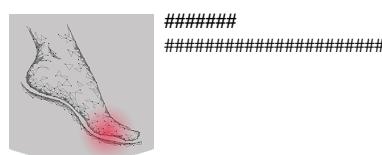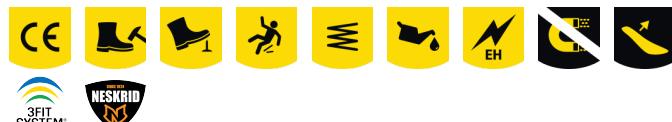

BLK

##:
##, ##, ##

##:
####, #####

####:
#####

##	####	####	##	EN ISO 20345
##	####	##/##/##/##	3.9	#### 0.8
	#####	##/##/##	41	#### 15
##	3D ####	##/##/##/##	61.1	#### 2
	#####	##/##/##	490	#### 20
##	SJ #####	##	25600/12800	25600/12800
##	##PU/##PU	## ³	84	#### 150
	#####	##	0.36	#### 0.28
	####SRA##	##	0.37	#### 0.32
	####SRA##	##	0.14	#### 0.13
	####SRB##	##	0.19	#### 0.18
	####SRB##	##	N/A	0.1 - 100
	####	##	N/A	0.1 - 100
	ESD#	##		
	####	J	27	#### 20
##	#####			
	#####100J#	##	N/A	N/A
	#####10kN#	##	N/A	N/A
	#####200J#	##	15.0	#### 14
	#####15kN#	##	19.0	#### 14

####:

#####, #####Safety Jogger#####



**HEAD-TO-TOE
PROTECTION**



Proudly ranked in the
top 1% by EcoVadis
for sustainability.

ENGINEERED
IN EUROPE

www.safetyjogger.com