




# SAFETY JOGGER

## INDUSTRIAL

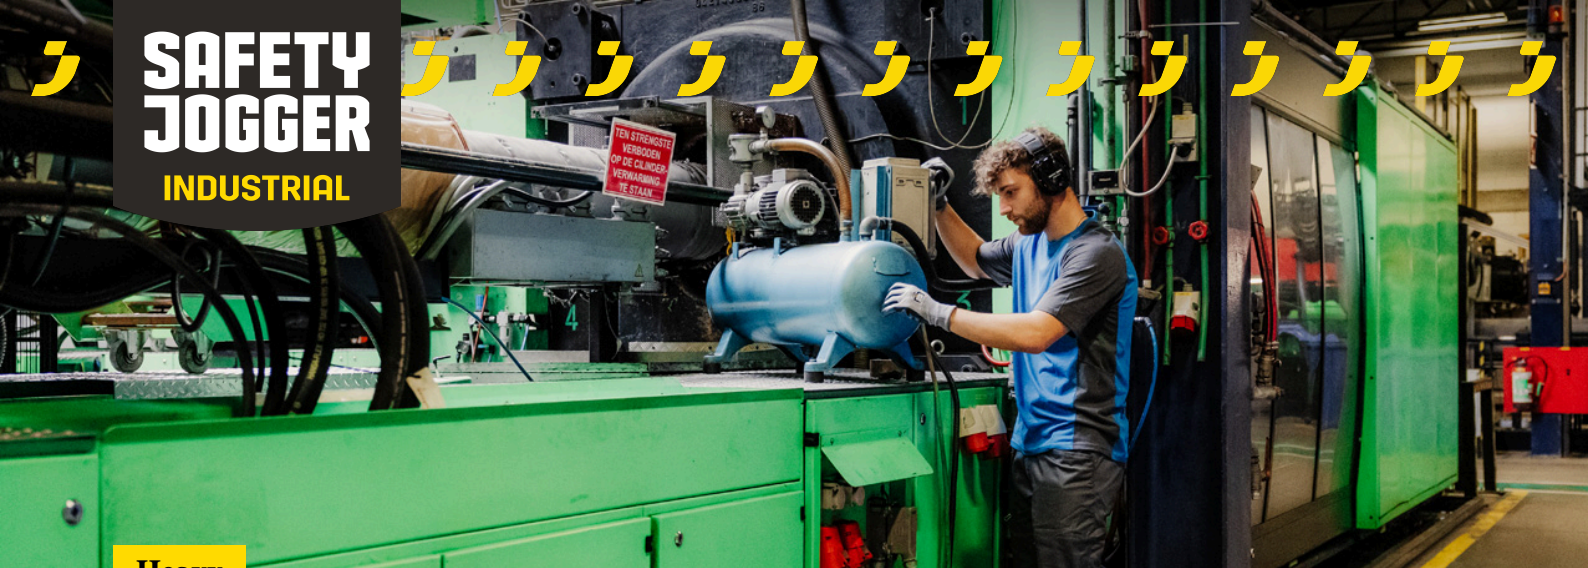

**Heavy**

## MAGO S3 MID

MAGOS3MID

**Lightweight and metal-free mid-cut safety shoe**

Safety Jogger's MAGO S3 mid-cut shoes offer lightweight, metal-free safety with antistatic and oil resistance. Ideal for cold, wet, or muddy environments across various industries. Offers comfort, grip, and protection.

Upper	Crazy Horse Leather
Lining	Mesh
Footbed	SJ foam footbed
Midsole	Anti-puncture Textile
Outsole	Rubber (NBR)
Toecap	Composite
Category	S3 / SRC, HRO
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.707 kg
Norms	ASTM F2413:2018 EN ISO 20345:2011



BLK



### Antistatic

Antistatic footwear prevents build-up of static electrical charges and ensures that they are discharged effectively. Volume resistance between 100 KiloOhm and 1 GigaOhm




### Breathable leather upper

Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.



### Composite toecap

Metalfree and lightweight, no thermal or electrical conductivity




### Metal free

Metal free safety shoes are in general lighter than regular safety shoes. They are also very beneficial for professionals who have to pass through metal detectors several times a day.



### Heel energy absorption

Heel energy absorption reduces the impact of jumps or running on the body of the wearer.



### Oil & fuel resistant

The outsole is resistant against oil and fuel.

**SAFETY  
JOGGER**  
WORKS

**HEAD-TO-TOE  
PROTECTION**



Proudly ranked in the  
top 1% by EcoVadis  
for sustainability.

**ENGINEERED  
IN EUROPE**

[www.safetyjogger.com](http://www.safetyjogger.com)

Industries:

Chemical, Construction, Industry, Oil & Gas, Mining

Environments:

Muddy environment, Cold environment, Uneven surfaces, Wet environment

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	Crazy Horse Leather			
	Upper: permeability to water vapor	mg/cm²/h	4.47	# 0.8
	Upper: water vapor coefficient	mg/cm²	38	# 15
Lining	Mesh			
	Lining: permeability to water vapor	mg/cm²/h	56.3	# 2
	Lining: water vapor coefficient	mg/cm²	451	# 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	25600/12800	25600/12800
Outsole	Rubber (NBR)			
	Outsole abrasion resistance (volume loss)	mm³	123	# 150
	Outsole slip resistance SRA: heel	friction	0.30	# 0.28
	Outsole slip resistance SRA: flat	friction	0.34	# 0.32
	Outsole slip resistance SRB: heel	friction	0.20	# 0.13
	Outsole slip resistance SRB: flat	friction	0.26	# 0.18
	Antistatic value	MegaOhm	Dry:16.9, Wet:5.6	0.1 - 1000
	ESD value	MegaOhm	Not applicable	0.1 - 100
	Heel energy absorption	J	30	# 20
Toecap	Composite			
	Impact resistance toecap (clearance after impact 100J)	mm	Not applicable	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	Not applicable	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	20.5	# 14
	Compression resistance toecap (clearance after compression 15kN)	mm	24.0	# 14

Sample size:

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.



HEAD-TO-TOE  
PROTECTION



Proudly ranked in the  
top 1% by EcoVadis  
for sustainability.



www.safetyjogger.com