




SAFETY JOGGER

INDUSTRIAL

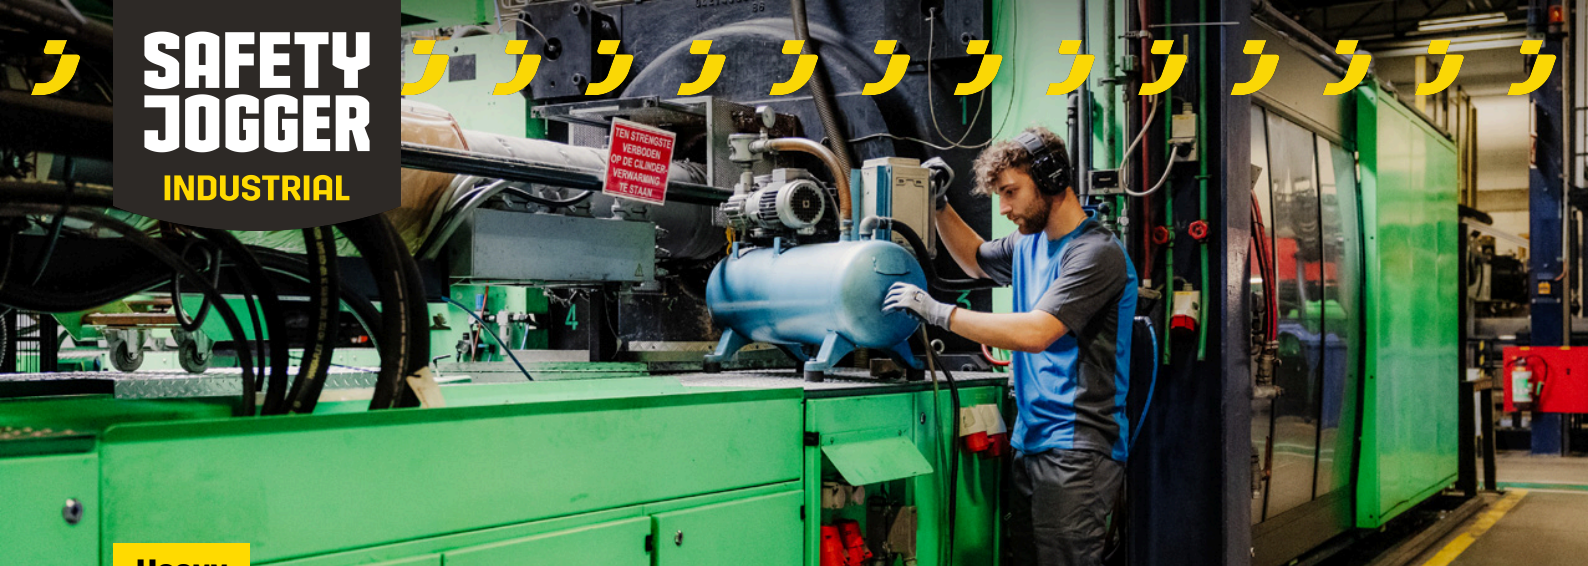

Heavy

MAGO S3 MID

MAGOS3MID

Lightweight and metal-free mid-cut safety shoe

Safety Jogger's MAGO S3 mid-cut shoes offer lightweight, metal-free safety with antistatic and oil resistance. Ideal for cold, wet, or muddy environments across various industries. Offers comfort, grip, and protection.

Upper	Pull-up Leather
Lining	Mesh
Footbed	SJ foam footbed
Midsole	Anti-puncture Textile
Outsole	Rubber
Toecap	Composite
Category	S3 / HRO, SRC
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.720 kg
Norms	ASTM F2413:2018 EN ISO 20345:2011



BLK



Antistatic

Antistatic footwear prevents build-up of static electrical charges and ensures that they are discharged effectively. Volume resistance between 100 KiloOhm and 1 GigaOhm




Breathable leather upper

Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.



Composite toecap

Metalfree and lightweight, no thermal or electrical conductivity




Metal free

Metal free safety shoes are in general lighter than regular safety shoes. They are also very beneficial for professionals who have to pass through metal detectors several times a day.



Heel energy absorption

Heel energy absorption reduces the impact of jumps or running on the body of the wearer.



Oil & fuel resistant

The outsole is resistant against oil and fuel.

SAFETY JOGGER
WORKS

Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

**ENGINEERED
IN EUROPE**

www.safetyjogger.com

Industries:

Chemical, Construction, Industry, Oil & Gas, Mining

Environments:

Muddy environment, Cold environment, Uneven surfaces, Wet environment

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	Pull-up Leather			
	Upper: permeability to water vapor	mg/cm²/h	4.47	≥ 0.8
	Upper: water vapor coefficient	mg/cm²	38	≥ 15
Lining	Mesh			
	Lining: permeability to water vapor	mg/cm²/h	56.3	≥ 2
	Lining: water vapor coefficient	mg/cm²	451	≥ 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	25600/12800	25600/12800
Outsole	Rubber			
	Outsole abrasion resistance (volume loss)	mm³	123	≤ 150
	Outsole slip resistance SRA: heel	friction	0.30	≥ 0.28
	Outsole slip resistance SRA: flat	friction	0.34	≥ 0.32
	Outsole slip resistance SRB: heel	friction	0.20	≥ 0.13
	Outsole slip resistance SRB: flat	friction	0.26	≥ 0.18
	Antistatic value	MegaOhm	Dry:16.9, Wet:5.6	0.1 - 1000
	ESD value	MegaOhm	Not applicable	0.1 - 100
Toecap	Composite			
	Heel energy absorption	J	30	≥ 20
	Impact resistance toecap (clearance after impact 100J)	mm	Not applicable	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	Not applicable	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	20.5	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	24.0	≥ 14

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP



www.safetyjogger.com