


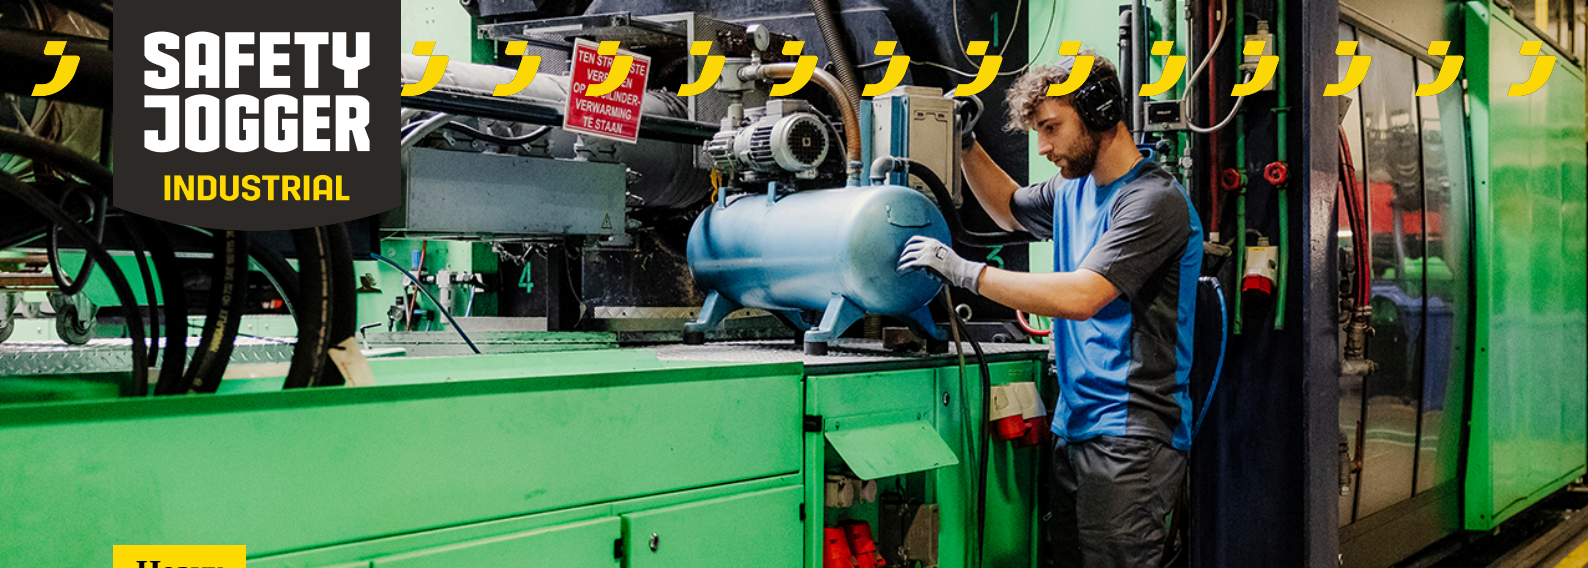

Heavy

MODULO LE S3S MID TG

MDLOLEAS3M


Tiger Grip ### ## ### ## ### ##
#####.

##, ## ##, ## ## ## ##, ## ## ## Tiger Grip #####
MODULO LE S3S MID #####.

## ##	## ## ##, ## ## ##
## ##	3D ##
##	SJ # ##
##	## ## ##
## #	##, BASF PU
Top	####
####	S3S / SR, SC, LG, ESD, ##, CI, FO, HRO
## ##	EU 35-50 / UK 3.0-14.0 / US 3.0-15.0 JPN 21.5-33.0 / KOR 230-330
## ##	0.666 kg
###	EN ISO 20345:2022+A1:2024 ASTM F2413:2024



BLK

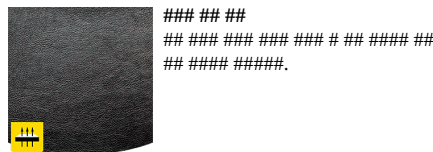

##.



300°C ## ## ## ## ##.



##(LG)

##.



##, ## ## ## ## ## ##
##.



##.
100% ## ## ## ## ##.



Tiger Grip-##
Tiger Grip ### ## ## ## ## ## ##
###, ## ## ##, ## ## ##, ## ## ##

##.

**SAFETY
JOGGER**
WORKS

**HEAD-TO-TOE
PROTECTION**



Proudly ranked in the
top 1% by EcoVadis
for sustainability.

**ENGINEERED
IN EUROPE**

www.safetyjogger.com

##:
##, ##, ##, ## # ##

##:
##, ### ##, ### ## ##, ##

##:
#####. ### ##### ## ##### ## ##.

	##	## ##	##	EN ISO 20345
## ##	# ### ##, ### ## ##			
	##: ### ##	mg/cm²/h	2.71	# 0.8
	##: ### ##	mg/cm²	26	# 15
## ##	3D ##			
	##: ### ##	mg/cm²/h	42.7	# 2
	##: ### ##	mg/cm²	342.3	# 20
##	SJ # ##			
	###: #####(##/##)(###)	##	Dry 25600 cycles/Wet 12800 cycles	25600/12800
## #	##, BASF PU			
	### #####(## ##)	mm³	117	# 150
	## ### ## - ### + NaLS - ## ## ##	##	0.44	# 0.31
	## ### ## - ### + NaLS - ## ## ##	##	0.42	# 0.36
	SR ### ## - ### + ##### - ##### ## ##	##	0.29	# 0.19
	SR ### ## - ### + ##### - ## ## ##	##	0.32	# 0.22
	### ## #	###	32.1	0.1 - 1000
	ESD #	###	63	0.1 - 100
	#### ## ##	J	37	# 20
Top	####			
	#### ## ##(## # ## 100J)	mm	N/A	N/A
	#### ## ##(## # ## ## 10kN)	mm	N/A	N/A
	#### ## ##(## # ## 200J)	mm	17.0	# 14
	### ## ## ##(## # ## ## 15kN)	mm	21.5	# 14

##:

##, ## ## ##### ## # #####. ## ##### ## Safety Jogger # ##### ##, ### ## ## ## ## ##### ##### ## # #####.



HEAD-TO-TOE
PROTECTION



Proudly ranked in the
top 1% by EcoVadis
for sustainability.



www.safetyjogger.com