


MODULO LE S3S MID TG

MDLOLEAS3M

Tiger Grip.

MODULO LE S3S MID #####
####, #####
Tiger Grip ###
#####.

####	#####
#####	3D-####
#####	##### SJ foam
#####	##### (#####)
#####	#####, BASF PU
#####	#####
#####	S3S / SR, SC, LG, ESD, HI, CI, FO, HRO
#####	EU 35-50 / UK 3.0-14.0 / US 3.0-15.0 JPN 21.5-33.0 / KOR 230-330
###	0.666 kg
#####	EN ISO 20345:2022+A1:2024 ASTM F2413:2024

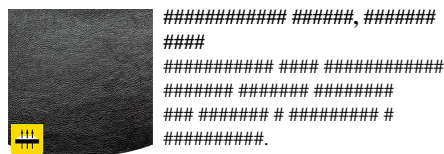

(HRO)

300°C.



Ladder Grip (LG)

#####



#####



#####



Tiger Grip-#####

Tiger Grip #####

#####

#####. #####. #####. #####.

#####

```
#####  
#####
```

	#####	#####	#####	EN ISO 20345
####	#####			
####	#####	##/## ² /#	2.71	# 0.8
	####: #####	##/## ²	26	# 15
#####	3D-####			
	#####: #####	##/## ² /#	42.7	# 2
	#####: #####	##/## ²	342.3	# 20
#####	##### SJ foam			
	#####: ##### # ##### (#####/#####) (#####)	#####	Dry 25600 cycles/Wet 12800 cycles	25600/12800
#####	#####			
	#####	## ³	117	# 150
	##### - Ceramic + NaLS - #####	#####	0.44	# 0.31
	#####			
	##### - Ceramic + NaLS - #####	#####	0.42	# 0.36
	SR ##### + ##### - #####	#####	0.29	# 0.19
	#####			
	##### SR - ##### + ##### - #####	#####	0.32	# 0.22
	#####			
	#####	#####	32.1	0.1 - 1000
	##### (ESD)	#####	63	0.1 - 100
	#####	J	37	# 20
#####	####-#####			
	##### (##### 100 #)	##	N/A	N/A
	##### (##### 10 #)	##	N/A	N/A
	##### (##### 200 #)	##	17.0	# 14
	##### (##### 15 #)	##	21.5	# 14

#####

```
##### Safety Jogger,#####
```