

**SAFETY
JOGGER**
INDUSTRIAL



#####

MODULO S3S MID TLS

MODULOS3MT


TLS#####

MODULO#####
ESD#####
#####

SJ#####

##PU##PU

S3S / SR, SC, ESD, #####,
EU 35-50 / UK 3.0-14.0 / US 3.0-15.0
JPN 21.5-33.0 / KOR 230-330
0.500 kg
ASTM F2413:2018
EN ISO 20345:2022+A1:2024
IS 15298 (Part 2): 2016

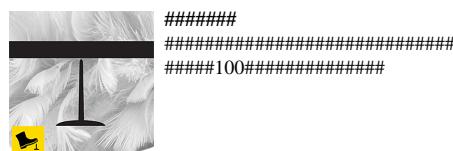

#####SC#

###




(SR)
#####SRA+SRB=SRC#####
#####SR#####
#####



#####



TLS#####
Safety Jogger#####TLS#####
#####TLS#####
#####



#####

**SAFETY
JOGGER
WORKS**

**HEAD-TO-TOE
PROTECTION**



Proudly ranked in the
top 1% by EcoVadis
for sustainability.

ENGINEERED
IN EUROPE

www.safetyjogger.com

#####:

##, #####, #####, #####, #####, #####

#####:

#####, #####, #####

#####:

#####

####	####	##	EN ISO 20345
####	#####		
	#####	mg/cm ² /h	8.20
	#####	mg/cm ²	68
##	####		# 0.8
	#####	mg/cm ² /h	60.62
	#####	mg/cm ²	485
####	SJ#####		# 15
	#####	####	Dry 25600
			cycles/Wet
			12800 cycles
#####	###PU/###PU		25600/12800
	#####	mm ³	# 150
		(Density: 1.09g/cm ³)	
	##### - #####NaLS - #####	#####	0.33
	##### - #####NaLS - #####	#####	0.42
	SR ### - ##### - #####	#####	0.22
	SR##### - ##### - #####	#####	0.25
	#####	#####	31.5
	ESD#	#####	0.1 - 100
	#####	J	21
			0.1 - 100
#####	#####		# 20
	#####		
	#####100J#	mm	N/A
	#####10kN#####	mm	N/A
	#####200J#	mm	15.5
	#####15kN#	mm	21.0
			# 14
			# 14

#####:

#####Safety Jogger #####



**HEAD-TO-TOE
PROTECTION**



Proudly ranked in the
top 1% by EcoVadis
for sustainability.

ENGINEERED
IN EUROPE

www.safetyjogger.com