

# SAFETY JOGGER

## INDUSTRIAL



##

## MODULO S3S MID TLS

MODULOS3MT

##### TLS #####

##### MODULO #####

#####ESD#####


##	##
##	####
##	SJ #####
##	#####
##	###/###
##	-
##	S3S / SR, SC, ESD, CI, FO
####	EU 35-50 / UK 3.0-14.0 / US 3.0-15.0 JPN 21.5-33.0 / KOR 230-330
####	0.500 kg
##	ASTM F2413:2018 EN ISO 20345:2022+A1:2024 IS 15298 (Part 2): 2016



GRY



BLK

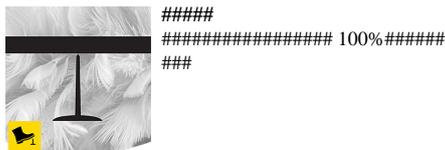

#####  
##### 100%#####  
###



### (SC)  
#####  
#####




### (SR)  
##### SRA+SRB=SRC ###SR #  
#####



Vegan##  
#####



TLS#####  
Safety Jogger###TLS#####  
#####Safety Jogger#####  
#####



###  
#####  
#####

##:  
##, ##, ##, ##, ##, ##

##:  
####, #####, ####


####:  
#####

##	##	####	##	EN ISO 20345
##	#####	##/####/##	8.20	#### 0.8
	#####	##/####	68	#### 15
##	####			
	#####	##/####/##	60.62	#### 2
	#####	##/####	485	#### 20
##	<b>SJ #####</b>			
	#####/#####	##	Dry 25600 cycles/Wet 12800 cycles	25600/12800
##	###/###			
	#####	## <sup>3</sup>	127mm <sup>3</sup> (Density:1.09g/ cm <sup>3</sup> )	#### 150
	##### - ## + NaLS - ####	##	0.33	#### 0.31
	##### - ## + NaLS - #####	##	0.42	#### 0.36
	SR ## - ## + ## - ####	##	0.22	#### 0.19
	SR ## - ## + ## - #####	##	0.25	#### 0.22
	####	##	31.5	0.1 - 1000
	ESD#	##	21	0.1 - 100
	####	J	31	#### 20
##	-			
	#####100J#	##	N/A	N/A
	#####10kN#	##	N/A	N/A
	#####200J#	##	15.5	#### 14
	#####15kN#	##	21.0	#### 14

####:  
#####,#####Safety Jogger#####



**HEAD-TO-TOE  
PROTECTION**

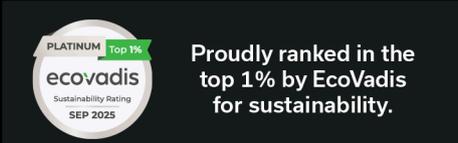

Proudly ranked in the top 1% by EcoVadis for sustainability.



[www.safetyjogger.com](http://www.safetyjogger.com)