

## Heavy


# VESUVIO S3 LOW

VESUVIOS3L

##### **PU/## ## ## ## ## ##**

Safety Jogger #####3M: ### ##, ## ## ##, ### ##, S3 ## # 3D ### ##  
### #####. ##### ## # ### #####.

|       |                                                                     |
|-------|---------------------------------------------------------------------|
| ## ## | #### ## ##                                                          |
| ## ## | 3D ##                                                               |
| ##    | SJ # ##                                                             |
| ##    | ##                                                                  |
| ## #  | #### PU/##(NBR)                                                     |
| Top   | ##                                                                  |
| ####  | S3 / SR, SC, ##, CI, FO, HRO                                        |
| ## ## | EU 35-48 / UK 3.0-13.0 / US 3.0-13.5<br>JPN 21.5-31.5 / KOR 230-315 |
| ## ## | 0.720 kg                                                            |
| ###   | ASTM F2413:2018<br>EN ISO 20345:2022                                |

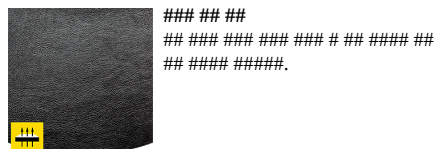

BLK



DBN

## ##:  
##, ##, ###, ## # ##, ##

## ##:  
## ##, ### ##, ## ##, ### ## ##, ## ##### ##, ## ##, ### ##

## ## ##:  
### ### ##### ##### ## ##### ## ##### ## #####. ### ##### ## ##### ## ##.

|       | ##                            | ## ##    | ##          | EN ISO 20345 |
|-------|-------------------------------|----------|-------------|--------------|
| ## ## | #### ## ##                    |          |             |              |
|       | ##: ### ##                    | mg/cm²/h | 5.3         | # 0.8        |
|       | ##: ### ##                    | mg/cm²   | 49.5        | # 15         |
| ## ## | 3D ##                         |          |             |              |
|       | ##: ### ##                    | mg/cm²/h | 103.5       | # 2          |
|       | ##: ### ##                    | mg/cm²   | 827.6       | # 20         |
| ##    | SJ # ##                       |          |             |              |
|       | ###: ####(##/##)(###)         | ##       | 25600/12800 | 25600/12800  |
| ## #  | ### PU/##(NBR)                |          |             |              |
|       | ### ####(## ##)               | mm³      | 95          | # 150        |
|       | ### ## ## SRA: ###            | ##       | 0.35        | # 0.28       |
|       | ## SRA# ### ##: ##            | ##       | 0.38        | # 0.32       |
|       | ### ## ## SRB: ###            | ##       | 0.15        | # 0.13       |
|       | ## ## SRB# ### ##: ##         | ##       | 0.21        | # 0.18       |
|       | ### ## #                      | ###      | 150         | 0.1 - 1000   |
|       | ESD #                         | ###      | N/A         | 0.1 - 100    |
|       | #### ## ##                    | J        | 28          | # 20         |
|       | ##                            |          |             |              |
| Top   | #### ## ##(## # ## 100J)      | mm       | N/A         | N/A          |
|       | #### ## #(## # ## ## 10kN)    | mm       | N/A         | N/A          |
|       | #### ## ##(## # ## 200J)      | mm       | 16          | # 14         |
|       | ### ## ## ##(## # ## ## 15kN) | mm       | 17          | # 14         |

### #: 42

##### ## ##### ##### ##, ## ## ##### ## # #####. ## ##### ## Safety Jogger # ##### ##, ### ## ## ## ## ##### ##### ## # #####.



HEAD-TO-TOE  
PROTECTION



Proudly ranked in the  
top 1% by EcoVadis  
for sustainability.



www.safetyjogger.com