

Medium

BESTBOY MF EH SB

BSTBOYMFH


Metal-free, all-time favorite safety shoe with electrical hazard protection

Safety Jogger BESTBOY METALFREE EH is a lightweight, metal-free safety shoe with composite toe cap, electrical hazard protection, and puncture-resistant midsole. Ideal for professionals in assembly, logistics, and industry.

Upper	Barton Action Leather
Lining	Mesh
Footbed	SJ foam footbed
Midsole	Anti-puncture Textile
Outsole	PU/PU
Toecap	Composite
Category	SB / PS, SR, WPA, LG, E, CI, FO
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.685 kg
Norms	ASTM F2413:2018 EN ISO 20345:2022



BLK

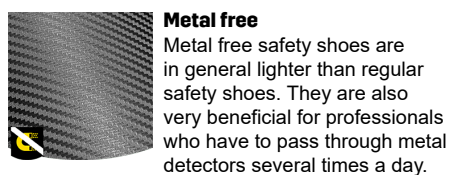

Metal free

Metal free safety shoes are in general lighter than regular safety shoes. They are also very beneficial for professionals who have to pass through metal detectors several times a day.



Composite toecap

Metalfree and lightweight, no thermal or electrical conductivity




Electrical hazard (EH)

Electrical hazard (EH) rated safety shoes have nonconductive outsoles. As a secondary source of protection they reduce the potential for electric shocks under dry conditions.



Non-marking outsole

Non-marking outsoles do not leave color marks on the ground.



Self-cleaning outsole

Self-cleaning outsoles are designed to reduce clogging of the profile.



Puncture resistant lightweight

Metal free, super flexible and ultralight puncture resistant midsole. Covers 100% of the bottom area of the last, no thermal conductivity.

Industries:
Assembly, Industry, Logistics

Environments:
Wet environment, Dry environment, Uneven surfaces

Maintenance instructions:
To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	Barton Action Leather			
	Upper: permeability to water vapor	mg/cm²/h	2.2	≥ 0.8
	Upper: water vapor coefficient	mg/cm²	25	≥ 15
Lining	Mesh			
	Lining: permeability to water vapor	mg/cm²/h	49.8	≥ 2
	Lining: water vapor coefficient	mg/cm²	398.8	≥ 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	25600/12800	25600/12800
Outsole	PU/PU			
	Outsole abrasion resistance (volume loss)	mm³	56.4	≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction	0.44	≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction	0.41	≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction	0.29	≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction	0.29	≥ 0.22
	Antistatic value	MegaOhm	N/A	0.1 - 1000
	ESD value	MegaOhm	N/A	0.1 - 100
	Heel energy absorption	J	26	≥ 20
Toecap	Composite			
	Impact resistance toecap (clearance after impact 100J)	mm	N/A	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	N/A	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	17.0	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	22.5	≥ 14

Sample size: 42

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.



Solutions for every workplace

INDUSTRIAL PROFESSIONAL TACTICAL TIGER GRIP

ENGINEERED
IN EUROPE

www.safetyjogger.com