

SAFETY JOGGER

INDUSTRIAL

Medium


HAVEN S3 SLIP ON S3S

HAVENS3SLP

Leather Slip-On Safety Shoes With Tiger Grip Technology

HAVEN S3 slipon shoes feature a nano carbon toecap, breathable leather upper and Tiger Grip Technology for safe, comfortable use across industries.


Upper	Full Grain Leather
Lining	Mesh
Footbed	SJ foam footbed
Midsole	Nonwoven
Outsole	Rubber (NBR)
Toecap	Nano Carbon
Category	S3S / SR, ESD, HI, CI, FO, HRO
Size range	EU 35-48 / UK 3.0-13.0 / US 3.0-13.5 JPN 21.5-31.5 / KOR 230-315
Sample weight	0.530 kg
Norms	EN ISO 20345:2022+A1:2024 ASTM F2413:2024

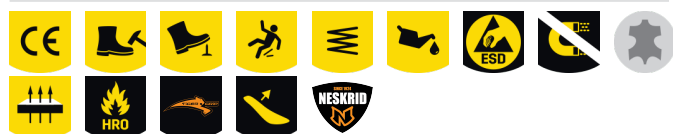

BLK



Breathable leather upper
Natural leather provides a high degree of wearer comfort combined with durability in versatile applications.



Metal free
Metal free safety shoes are in general lighter than regular safety shoes. They are also very beneficial for professionals who have to pass through metal detectors several times a day.




Tiger Grip Technology
Outsoles with Tiger Grip technology are renowned for their slip resistance, ability to withstand wear and tear and excellent traction on different surfaces, even wet and uneven ones. They are crafted with an exclusive rubber compound and engineered with specific patterns and grooves to enhance grip and stability.



Nano carbon toecap
Ultralight high-tech material, metalfree with no thermal or electrical conductivity.



Electrostatic Discharge (ESD)
ESD provides the controlled discharge of electrostatic energy that can damage electronic components and avoids risks of ignition resulting from electrostatic charges. Volume resistance between 100 KiloOhm and 100 MegaOhm.



Oil & fuel resistant
The outsole is resistant against oil and fuel.

**SAFETY
JOGGER**
WORKS

**HEAD-TO-TOE
PROTECTION**



Proudly ranked in the top 1% by EcoVadis for sustainability.

**ENGINEERED
IN EUROPE**

www.safetyjogger.com

Industries:

Assembly, Catering, Food & beverages, Industry, Logistics

Environments:

Extreme slippery surfaces, Warm surfaces, Wet environment

Maintenance instructions:

To extend the life of your shoes, we recommend to clean them regularly and to protect them with adequate products. Do not dry your shoes on a radiator, nor nearby a heat source.

	Description	Measure unit	Result	EN ISO 20345
Upper	Full Grain Leather			
	Upper: permeability to water vapor	mg/cm ² /h	1.25	≥ 0.8
	Upper: water vapor coefficient	mg/cm ²	18	≥ 15
Lining	Mesh			
	Lining: permeability to water vapor	mg/cm ² /h	86.31	≥ 2
	Lining: water vapor coefficient	mg/cm ²	691	≥ 20
Footbed	SJ foam footbed			
	Footbed: abrasion resistance (dry/wet) (cycles)	cycles	25600/12800	25600/12800
Outsole	Rubber (NBR)			
	Outsole abrasion resistance (volume loss)	mm ³	106	≤ 150
	Basic Slip resistance - Ceramic + NaLS - Forward heel slip	friction	0.40	≥ 0.31
	Basic Slip resistance - Ceramic + NaLS - Backward forepart slip	friction	0.53	≥ 0.36
	SR Slip resistance - Ceramic + glycerin - Forward heel slip	friction	0.24	≥ 0.19
	SR Slip resistance - Ceramic + glycerin - Backward forepart slip	friction	0.33	≥ 0.22
	Antistatic value	MegaOhm	96.3	0.1 - 1000
	ESD value	MegaOhm	6.2	0.1 - 100
	Heel energy absorption	J	21	≥ 20
Toecap	Nano Carbon			
	Impact resistance toecap (clearance after impact 100J)	mm	N/A	N/A
	Compression resistance toecap (clearance after compression 10kN)	mm	N/A	N/A
	Impact resistance toecap (clearance after impact 200J)	mm	18.5	≥ 14
	Compression resistance toecap (clearance after compression 15kN)	mm	23.0	≥ 14

Sample size:

Our shoes are constantly evolving, the technical data above may change. All product names and brand Safety Jogger, are registered and may not be used or reproduced in any format, without written consent from us.



HEAD-TO-TOE
PROTECTION



Proudly ranked in the
top 1% by EcoVadis
for sustainability.



www.safetyjogger.com